

[illegible]

PROJECT / DIRECT CHARGE MATERIALS REQUEST

نیاز کمال ۳ سالہ حضاری


تقاضای خرید کالای پروژه / خرید مستقیم

ACCT. NO. ٠٥١-١٣٩٤	شماره حساب ٢٧٠٨٠٦٣٠٠٠٠٠٠٠٠	تاریخ باز به 1405/08	تاریخ در دولت 1404/12	مبلغ کل 33	جمع حاکمات TOTAL VALUE (L.A.)	چشم ارایش ها PLAN NO.	شماره شرح 15
RECEIPT NO.	INVOICE NO.	WORK ORDER NO.	REQUEST DATE	SHP			
REQD. QTY.	REQUIRED DATE	U.S.D. CODE	U.S.D. CODE	U.S.D. CODE	U.S.D. CODE	U.S.D. CODE	U.S.D. CODE
01	05000000001	NO	DESCRIPTION 2 SET HYD LINER HANGER 9 5/8", 53.5k L-40 W/ 2 SET TIE BACK 9 5/8", 53.5k L-80	شرح ٢ ست هانجر ٩ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۴۰ با ۲ ست تیربک ۹ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۸۰	REQUIRED QTY.	VALUE (EST)	
02	09000000002	NO	SETTING COLLAR PROFILE (LG) 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", GAS TIGHT PREMIUM CONNECTION, PIN x PIN L-80 TYPE-1 AS PER API 5CT, FOR CONNECTION TO RUNNING AND SETTING TOOLS MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM)	٢ ست هانجر ٩ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۴۰ با ۲ ست تیربک ۹ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۸۰	02		
03	09000000003	NO	PACK OFF BUSHING 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", PREMIUM CONNECTION, PIN x BOX L-80 TYPE-1 AS PER API 5CT, PDC DRILLABLE MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM)	٢ ست هانجر ٩ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۴۰ با ۲ ست تیربک ۹ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۸۰	02		
			LINER HANGER & ACC. HYDRAULIC SET, TANDEM CONE, 9-5/8", 53.5 PPF SPECIAL DRIFT DIAMETER 8 1/2" MATERIAL: L-80 TYPE-1 AS PER API 5CT MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB THREAD: GAS TIGHT PREMIUM CONNECTION (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM) MIN. SETTING PRESSURE: (SHALL BE CONFIRMED WITH MANUFACTURER) MAX. SETTING PRESSURE: 250' - 300' F, WORKING PRESSURE : 5000 - 7000 PSI TEMPERATURE RATING: 250° - 300° F, D.D. RANGE 12.25" - 12.25" HOST CASING: 13 3/8", 68 - 72 PPF, L-80, D.D. RANGE 12.25" - 12.25" NOTE: SHALL BE SUITABLE TO RUN & SET IN OIL BASE MUD	٢ ست هانجر ٩ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۴۰ با ۲ ست تیربک ۹ و ۵/۸ اینچ، ۵۳٫۵ کیلوگرم، L-۸۰	02		

کمیسیون مناقصات

14.5 / 13 / 4

شرکت نفت مناطق مرکزی ایران

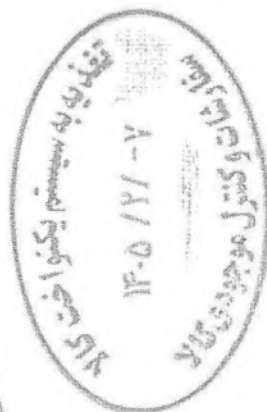

PROJECT / DIRECT CHARGE MATERIALS REQUEST CONTINUATION SHEET

REQUEST NO.

ITEM NO	MISC NO	تعداد اقلام	شرح	CROSS REF.	مقدار	REQUIRED QTY.
رقم البند	رقم الصنف	عدد القطع	وصف البند	STORE NO.	الطلب رقم	الطلب رقم
04	0900000004	NO	TIE BACK SLEEVE PBR, 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2" THREAD: GAS TIGHT PREMIUM CONNECTION BOX DOWN (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM) MATERIAL: L-80 TYPE-1 AS PER API 5CT MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB LENGTH: 6 FT	2 SET HYD LINER HANGER 9 5/8", 53.5#, L-80 W/ 2 SET TIE BACK 9 5/8", 53.5#, L-80	02	
05	0900000005	NO	FLOAT SHOE (DOUBLE VALVE) 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", L-80 TYPE-1 AS PER API 5CT, GAS TIGHT PREMIUM CONNECTION BOX UP, PDC DRILLABLE MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM)		02	
06	0900000006	NO	FLOAT COLLAR 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", L-80 TYPE-1 AS PER API 5CT, GAS TIGHT PREMIUM CONNECTION, PDC DRILLABLE MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM)		02	
07	0900000007	NO	LATCH DOWN COLLAR WITH PDC DRILLABLE PROFILE CW BALL, 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2" L-80 TYPE-1 AS PER API 5CT, GAS TIGHT PREMIUM CONNECTION, NON ROTATING FEATURES FOR PLUGS MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM) SHEARING PRESSURE: (SHALL BE CONFIRMED WITH MANUFACTURER)		02	
08	0900000008	NO	TIE BACK SEAL ASSY (SEAL NIPPLE) 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", PREMIUM CONNECTION L-80 TYPE-1 AS PER API 5CT, BOX UP TEMPERATURE RATING: 250° - 300° F MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB NUMBERS OF SEALS: SPECIFIED BY MANUFACTURE SEALS OD: SPECIFIED BY MANUFACTURE LENGTH: 6 FT (AS PER ITEM 4) SEALS MATERIAL: HNBR (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM)		02	

کمیسیون مناقصات

14.5 / 13 / 4

شرکت نفت مناطق مرکزی ایران





شرکت نفت مناطق مرکزی ایران

PROJECT / DIRECT CHARGE MATERIALS REQUEST CONTINUATION SHEET

شماره تقاضا

REQUEST NO.

ردیف	ITEM NO.	مکان	شرح کالا	مقدار	واحد	مقدار تقاضا	مقدار موجود	مقدار درخواست	مقدار موجود	مقدار درخواست	مقدار موجود	مقدار درخواست
ردیف	ITEM NO.	مکان	شرح کالا	مقدار	واحد	مقدار تقاضا	مقدار موجود	مقدار درخواست	مقدار موجود	مقدار درخواست	مقدار موجود	مقدار درخواست
09	0900000009	NO	SETTING COLLAR PROFILE (L.G) 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", GAS TIGHT PREMIUM CONNECTION, PIN x PIN L-80 TYPE-1 AS PER API 5CT, FOR CONNECTION TO RUNNING AND SETTING TOOLS MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE INTERCHANGEABLE WITH NEW VAM) NOTE: SHALL BE SUITABLE TO RUN & SET IN OIL BASE MUD	02								
10	0900000010	NO	TIE BACK SLEEVE PDS 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2" THREAD : GAS TIGHT PREMIUM CONNECTION BOX DOWN (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM) MATERIAL : L-80 TYPE-1 AS PER API 5CT MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB LENGTH : 6 FT	02								
11	0900000011	NO	PACK OFF BUSHING 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2", PREMIUM CONNECTION, PIN x BOX L-80 TYPE-1 AS PER API 5CT, PDC DRILLABLE MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM)	02								
12	0900000012	NO	LINER WIPER PLUG 9-5/8" TO WIPE CEMENT INSIDE 53.5 PPF & 53.5 PPF LINER, PDC DRILLABLE, NON ROTATING TO LAND AND LOCK INSIDE LDC MATERIAL : SPECIFIED BY MANUFACTURE ELASTOMER MATERIAL: NBR TEMPERATURE RATING : 250° - 300° F SHEARING PRESSURE: (SHALL BE CONFIRMED WITH MANUFACTURER)	04								
13	0900000013	NO	PUMP DOWN PLUG MATERIAL: SPECIFIED BY MANUFACTURE, NON ROTATING TO LAND AND LOCK INSIDE WIPER PLUG ELASTOMER MATERIAL: NBR TEMPERATURE RATING : 250° - 300° F FOR 5" DRILL PIPE, PDC DRILLABLE HOLD PRESSURE: (SHALL BE CONFIRMED WITH MANUFACTURER)	04								
14	0900000014	NO	LATCH DOWN COLLAR WITH PDC DRILLABLE PROFILE CW BALL, 9-5/8", 53.5 PPF, SPECIAL DRIFT DIAMETER 8 1/2" L-80 TYPE-1 AS PER API 5CT, GAS TIGHT PREMIUM CONNECTION, NON ROTATING FEATURES FOR PLUGS MIN. INTERNAL YIELD PRESSURE: 7930 PSI MIN. COLLAPSE PRESSURE: 6620 PSI, MIN. TENSILE STRENGTH: 1244 KLB (SHALL BE FULL INTERCHANGEABLE WITH NEW VAM) SHEARING PRESSURE: (SHALL BE CONFIRMED WITH MANUFACTURER)	02								
15	0900000015	SET	SETTING TOOL FOR HYDRAULIC LINER HANGER 9-5/8" WITH ALL ACCESSORIES	01								



کمیسیون مناقصات
۱۴۰۵ / ۳ / ۴
شرکت نفت مناطق مرکزی ایران

Handwritten signatures and stamps

کمیسیون مناقصات

17.5 / 13 / 12

شرکت نفت مناطق مرکزی ایران