


| | | | | | | | | | | | | | |
|----------|--|-------------------------|--|----------------------|--|-------------------------------|--|----------------------------------------------------------------------|--|-------------------------|--|----------------------------------------------------------------|--|
| MT 26 | | DES-QUATION 50 01 31 | | STORE NO 50 01 31 | | REQUEST NO. SHP-3194104160 | | PROJECT / DIRECT CHARGE MATERIALS REQUEST CREATE / AMEND / DELETE | | نیاز سه ساله اقلام کالا | | تقاضای خرید کالای پروژه / خرید مستقیم ایجاد / اصلاح / ابطال | |
|----------|--|-------------------------|--|----------------------|--|-------------------------------|--|----------------------------------------------------------------------|--|-------------------------|--|----------------------------------------------------------------|--|

| | | | | | | | | | | | |
|-----------|--|---------------|--|--------------|--|------------|--|-------------|--|----------|--|
| ACCT. NO. | | REQUIRED DATE | | REQUEST DATE | | TOTAL QTY. | | TOTAL VALUE | | PLAN NO. | |
| 1405.03 | | 1404.06 | | SHP | | 08 | | 75140 | | | |

| ITEM NO | MISC NO | UNIT | DESCRIPTION | REQUIRED QTY. | VALUE (EST.) | CROSS REF. | STORE NO | ADMIN | REQUEST NO | ITEM |
|---------|------------|------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|------------|----------|-------|------------|------|
| 01 | 0400000001 | MT | TUBING 7", 29 PPF, T-95, PSL 2, R2, GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM), API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, SPECIAL DRIFT DIA. (6.125") MIN. INTERNAL YIELD PRESSURE : 9,690 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 803 (1000 LB) MIN. COLLAPSE RESISTANCE : 7,840 PSI | 25,000 m | | | | | | |
| 02 | 0400000002 | MT | TUBING 4 1/2", 13.5 PPF, L-80 TYPE 1, PSL 2, R2, GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM), API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, API DRIFT DIA.(3.795") MIN. INTERNAL YIELD PRESSURE : 9,020 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 307 (1000 LB) MIN. COLLAPSE RESISTANCE : 8,540 PSI | 50,000 m | | | | | | |

| | | | | | | | | | | | |
|---------------------------------------|--|---------------------------------------|--|---------------------------------------|--|---------------------------------------|--|---------------------------------------|--|---------------------------------------|--|
| نام و نام خانوادگی حسین نیکو اکبری | | نام و نام خانوادگی حسین نیکو اکبری | | نام و نام خانوادگی حسین نیکو اکبری | | نام و نام خانوادگی حسین نیکو اکبری | | نام و نام خانوادگی حسین نیکو اکبری | | نام و نام خانوادگی حسین نیکو اکبری | |
| تاریخ و امضاء ۱۴۰۴/۱۱/۱۷ | | تاریخ و امضاء ۱۴۰۴/۱۱/۱۷ | | تاریخ و امضاء ۱۴۰۴/۱۱/۱۷ | | تاریخ و امضاء ۱۴۰۴/۱۱/۱۷ | | تاریخ و امضاء ۱۴۰۴/۱۱/۱۷ | | تاریخ و امضاء ۱۴۰۴/۱۱/۱۷ | |

شرکت نفت مناطق مرکزی ایران
 بودجه و کنترل هزینه های سرمایه ای
 تاریخ: ۱۴۰۴/۱۱/۱۷
 پروژه: ۱۴۰۴/۱۱/۱۷

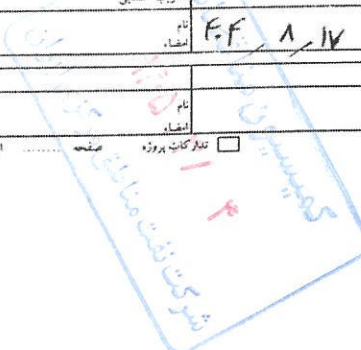

۱۴۰۴/۱۱/۱۷ ۱۴۰۴/۱۱/۱۷ ۱۴۰۴/۱۱/۱۷ ۱۴۰۴/۱۱/۱۷

REQUEST NO.

شماره تقاضا

PROJECT / DIRECT CHARGE MATERIALS REQUEST
CONTINUATION SHEET

| شماره قفسه ITEM NO. | | شماره طبقه مخزن کالا MESC NO. | | واحد کالا UNIT | | شرح کالا DESCRIPTION | | مقدار REQUIRED QTY. | | ارزش تقریبی VALUE (EST.) | | میزان QOS | | میزان SOS | | CROSS REF. | | | | شماره درخواست REQUEST NO. | | شماره قفسه ITEM NO. | |
|------------------------|------------|----------------------------------|--|-------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------|--|-----------------------------|--|--------------|--|--------------|--|------------|--|--|--|------------------------------|--|------------------------|--|
| | | | | | | | | | | | | | | | | | | | | | | | |
| 03 | 0400000003 | | | NO | | PUP JOINT 7" , 29 PPF , T-95 , PSL 2 , (2 METER) , GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM) , API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, SPECIAL DRIFT DIA. (6.125") MIN. INTERNAL YIELD PRESSURE : 9,690 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 803 (1000 LB) MIN. COLLAPSE RESISTANCE : 7,840 PSI | | 40 | | | | | | | | | | | | | | | |
| 04 | 0400000004 | | | NO | | PUP JOINT 7" , 29 PPF , T-95 , PSL 2 , (3 METER) , GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM) , API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, SPECIAL DRIFT DIA. (6.125") MIN. INTERNAL YIELD PRESSURE : 9,690 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 803 (1000 LB) MIN. COLLAPSE RESISTANCE : 7,840 PSI | | 20 | | | | | | | | | | | | | | | |
| 05 | 0400000005 | | | NO | | PUP JOINT 7" , 29 PPF , T-95 , PSL 2 , (5 METER) , GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM) , API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, SPECIAL DRIFT DIA. (6.125") MIN. INTERNAL YIELD PRESSURE : 9,690 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 803 (1000 LB) MIN. COLLAPSE RESISTANCE : 7,840 PSI | | 10 | | | | | | | | | | | | | | | |
| 06 | 0400000006 | | | NO | | PUP JOINT 4 1/2" , 13.5 PPF , L-80 TYPE 1 , PSL 2 , (2 METER) , GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM) , API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, API DRIFT DIA.(3.795") MIN. INTERNAL YIELD PRESSURE : 9,020 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 307 (1000 LB) MIN. COLLAPSE RESISTANCE : 8,540 PSI | | 40 | | | | | | | | | | | | | | | |
| 07 | 0400000007 | | | NO | | PUP JOINT 4 1/2" , 13.5 PPF , L-80 TYPE 1 , PSL 2 , (3 METER) , GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM) , API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, API DRIFT DIA.(3.795") MIN. INTERNAL YIELD PRESSURE : 9,020 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 307 (1000 LB) MIN. COLLAPSE RESISTANCE : 8,540 PSI | | 20 | | | | | | | | | | | | | | | |
| 08 | 0400000008 | | | NO | | PUP JOINT 4 1/2" , 13.5 PPF , L-80 TYPE 1 , PSL 2 , (5 METER) , GAS TIGHT PREMIUM CONNECTION (INTERCHANGEABLE WITH NEW VAM) , API 5CT SOUR SERVICE ACCORDING TO NACE MR 0175 SEAMLESS, API DRIFT DIA.(3.795") MIN. INTERNAL YIELD PRESSURE : 9,020 PSI MIN. PIPE BODY / JOINT YIELD STRENGTH : 307 (1000 LB) MIN. COLLAPSE RESISTANCE : 8,540 PSI | | 10 | | | | | | | | | | | | | | | |

| | |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------|
| DELIVERY TIME (ACCORDING TENDER DOCUMENTS): | 9 MONTHS |
| DELIVERY LOCATION: | DALAN DRILLING WAREHOUSE |
| PACKING: | BUNDLE |
| INSPECTION: | ALL COST OF INSPECTION ARE RESPONSIBILITY OF MANUFACTURER/SUPPLIER.PROCEDURE OF INSPECTIN IS DETERMINED BY ICOFC TECHNICAL INSPECTION DEPARTMENT. |
| REFERENCE STANDARDS: | API 5CT - API 5A5 - API 5C5 - NACE MR 0175 -API 5C2 - API 5C3 LAST EDITION. |
| PROTECTORS (Z ENDS): | METALLOPLASTIC CLOSE END UNLIFTABLE. |

